

Silicon NPN Power Transistors**2SC2336 2SC2336A 2SC2336B****DESCRIPTION**


- With TO-220 package
- Complement to type 2SA1006, 2SA1006A, 2SA1006B

APPLICATIONS

- Audio frequency power amplifier
- High frequency power amplifier

PINNING

PIN	DESCRIPTION
1	Base
2	Collector; connected to mounting base
3	Emitter

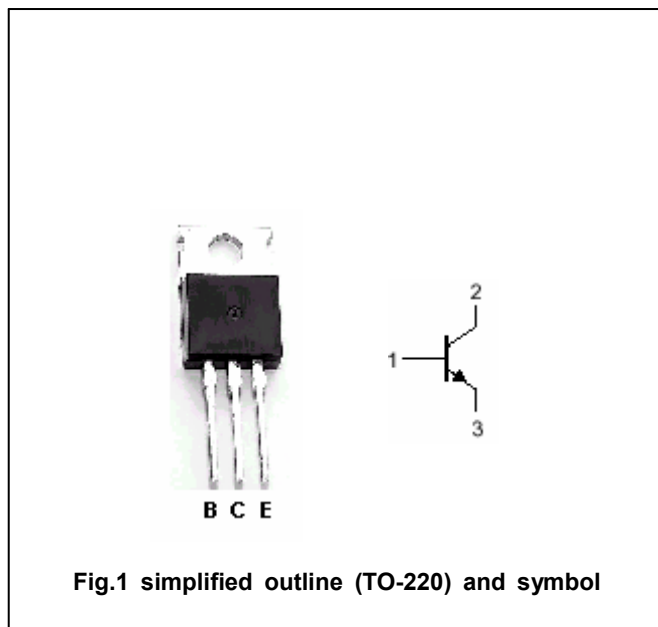**Absolute maximum ratings($T_a=25^\circ\text{C}$)**

SYMBOL	PARAMETER		CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2SC2336	Open emitter	180	V
		2SC2336A		200	
		2SC2336B		250	
V_{CEO}	Collector-emitter voltage	2SC2336	Open base	180	V
		2SC2336A		200	
		2SC2336B		250	
V_{EBO}	Emitter-base voltage		Open collector	5	V
I_C	Collector current			1.5	A
I_{CM}	Collector current-peak			3.0	A
P_T	Total power dissipation		$T_a=25^\circ\text{C}$	1.5	W
			$T_c=25^\circ\text{C}$	25	
T_j	Junction temperature			150	$^\circ\text{C}$
T_{stg}	Storage temperature			-55~150	$^\circ\text{C}$

Silicon NPN Power Transistors 2SC2336 2SC2336A 2SC2336B

CHARACTERISTICS**T_j=25℃ unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CE(sat)}	Collector-emitter saturation voltage	I _C =0.5A; I _B =50mA			1.0	V
V _{BE(sat)}	Base-emitter saturation voltage	I _C =0.5A; I _B =50mA			1.5	V
I _{CBO}	Collector cut-off current	V _{CB} =150V; I _E =0			1	μA
I _{EBO}	Emitter cut-off current	V _{EB} =3V; I _C =0			1	μA
h _{FE-1}	DC current gain	I _C =5mA; V _{CE} =5V	30			
h _{FE-2}	DC current gain	I _C =150mA; V _{CE} =5V	60		320	
C _{ob}	Output capacitance	I _E =0; V _{CB} =10V, f=1MHz		30		pF
f _T	Transition frequency	I _C =100mA; V _{CE} =10V		95		MHz


◆ **h_{FE-2} Classifications**

R	Q	P
60-120	100-200	160-320

Silicon NPN Power Transistors

2SC2336 2SC2336A 2SC2336B

PACKAGE OUTLINE

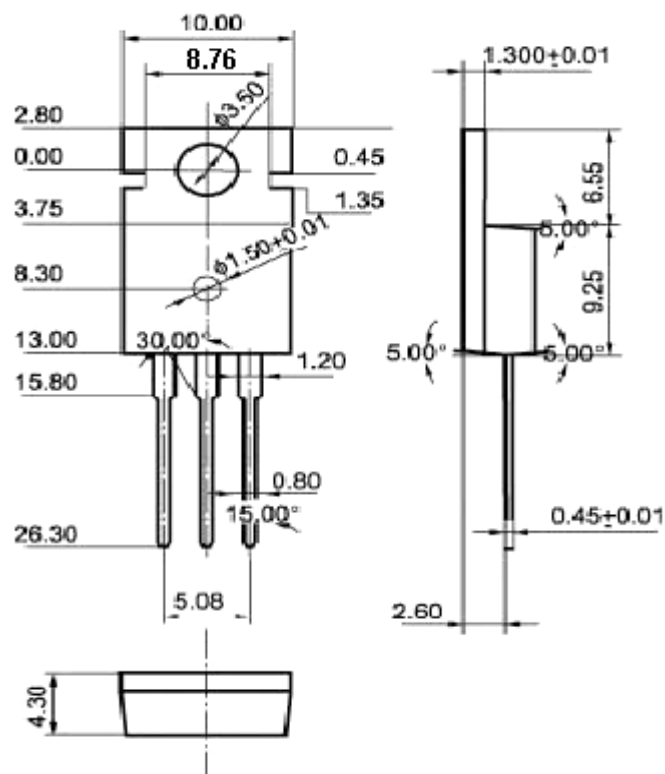Fig.2 Outline dimensions(unindicated tolerance: ± 0.10 mm)

Silicon NPN Power Transistors

2SC2336 2SC2336A 2SC2336B

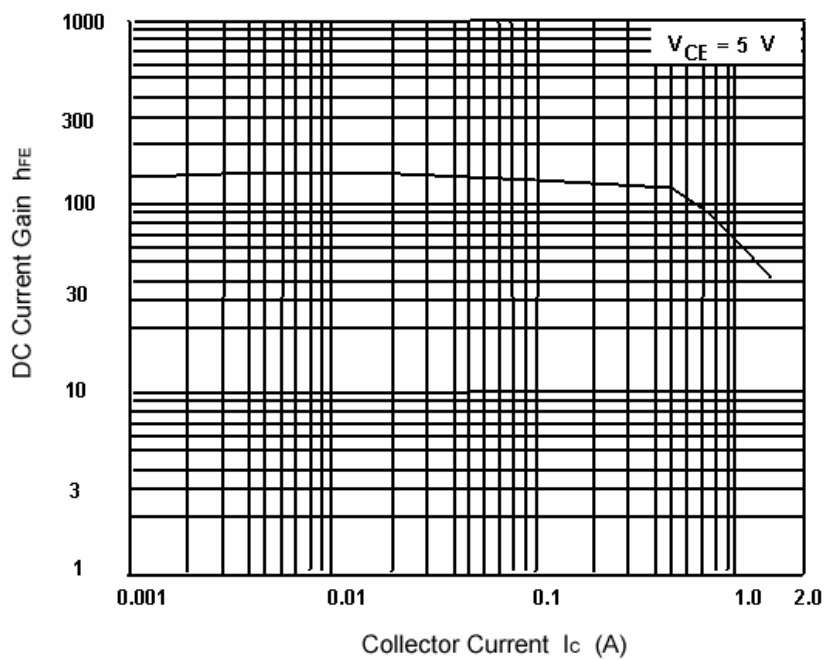


Fig.3 DC current Gain

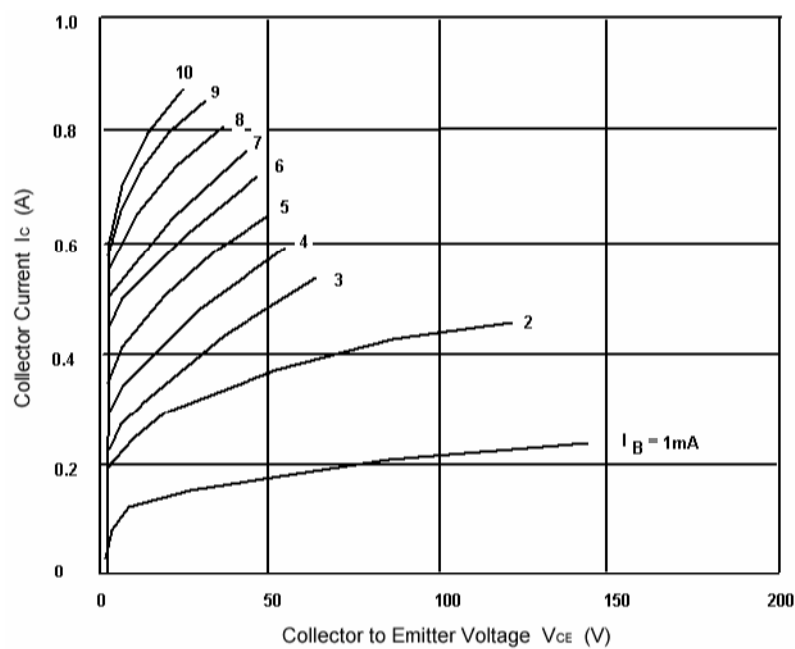


Fig.4 Static Characteristic

Silicon NPN Power Transistors 2SC2336 2SC2336A 2SC2336B

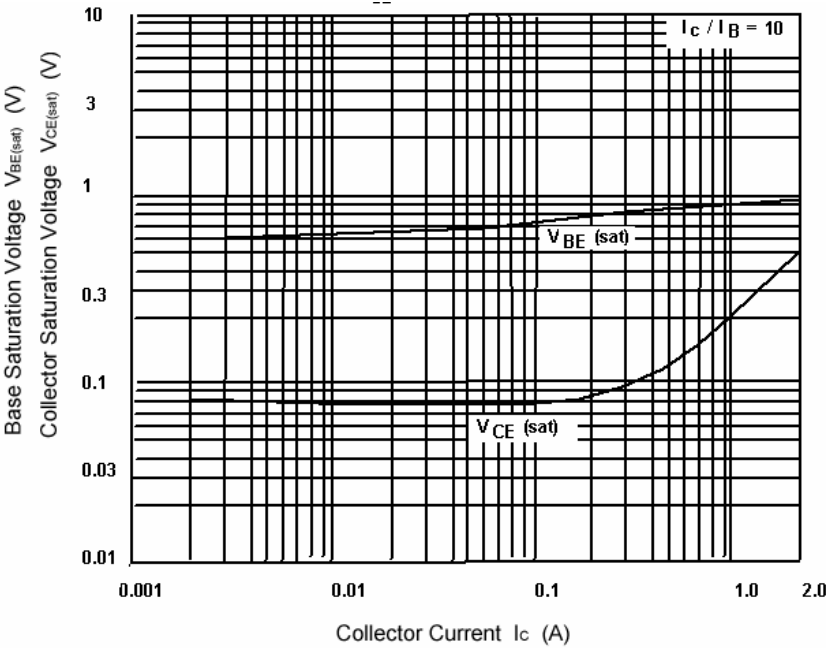


Fig.5 Base-Emitter Saturation Voltage
Collector-Emmitter Saturation Voltage

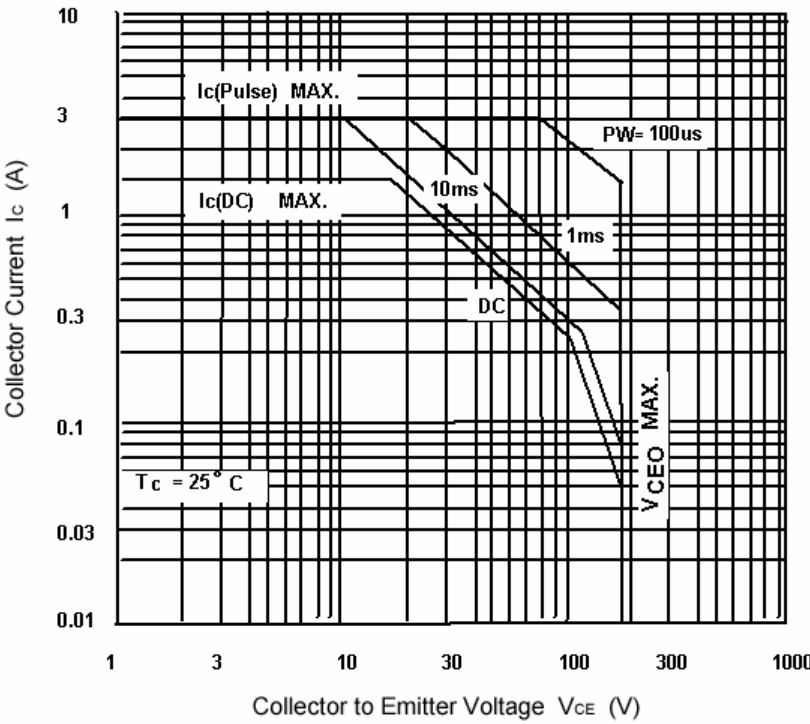


Fig.6 Safe Operating Area